


VOLKSWAGEN

AKTIENGESELLSCHAFT

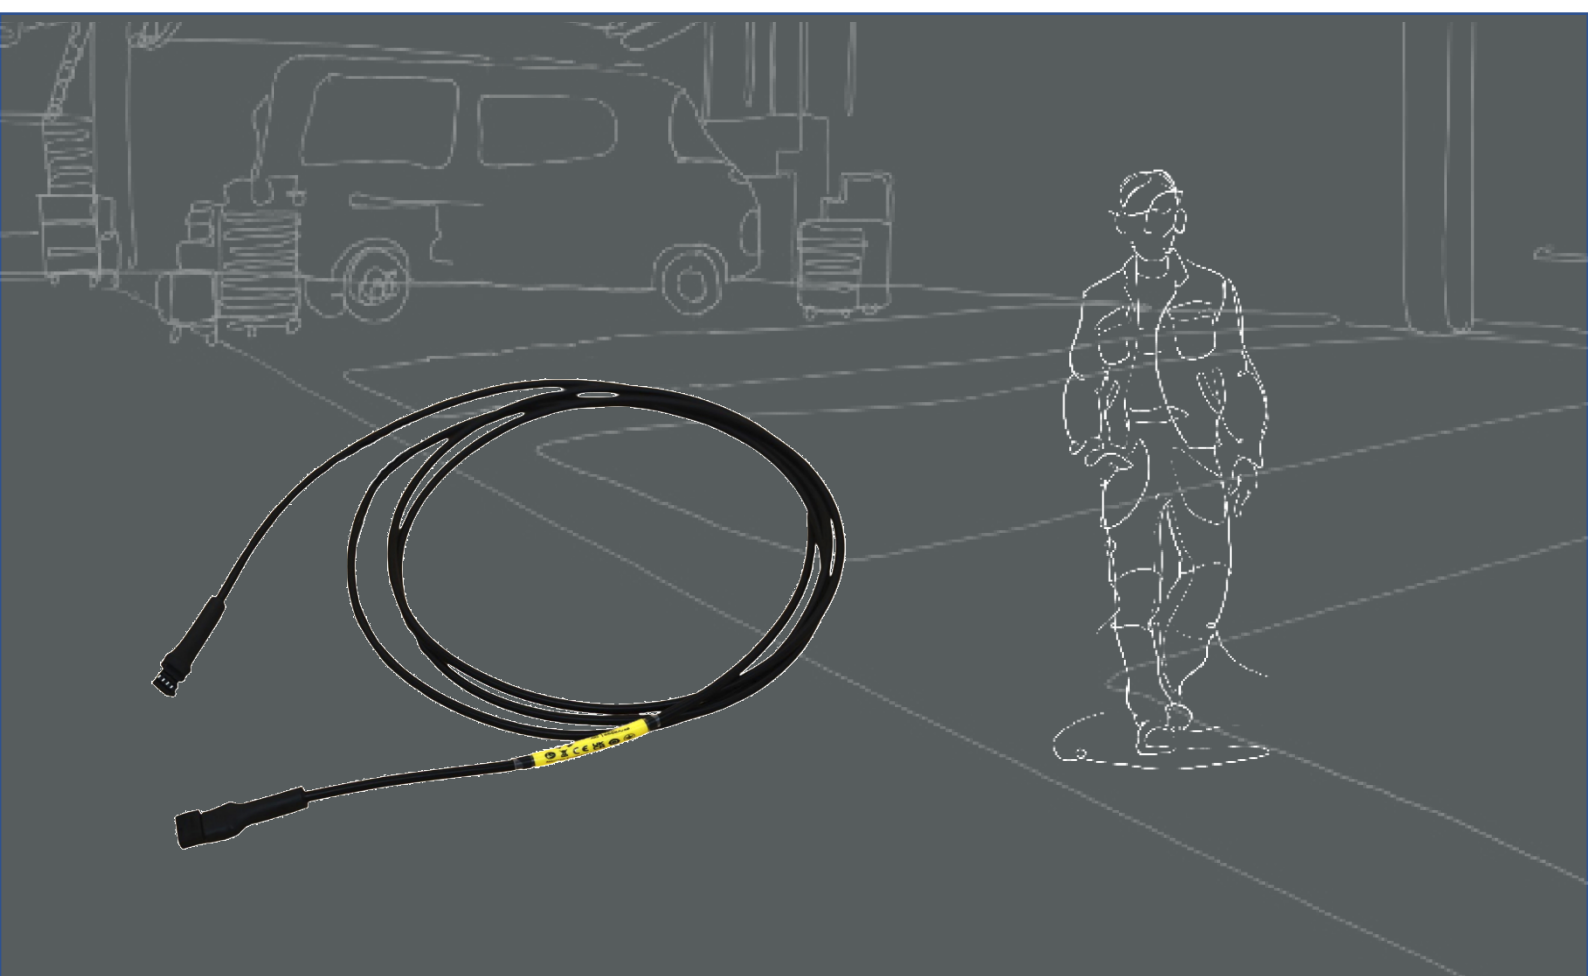

Operating Manual

Connection cable VAS 6558A/48



Revision	Date	Reason
V00	19.01.2024	First edition

imprint

Manufacturer

Akkuteam Energietechnik GmbH
Theodor-Heuss-Strasse 4
37412 Herzberg am Harz
Telephone: +49 (0) 5521 9981-0
Fax: +49 (0) 5521 9981-11
info@akkuteam.de
www.akkuteam.de

duplication

Reproduction or reprinting, even in extracts, always requires the written permission of the manufacturer.

copyright

ORIGINAL USER MANUAL
All rights reserved.
All texts, images and graphics are subject to copyright and other laws protecting intellectual property.
Copyright 2023 Akkuteam Energietechnik GmbH.

Image sources

Warning signs, prohibition, mandatory and standard symbols come from public sources such as generally accessible areas on the Internet. CAD product images and product photos come from the manufacturer. Images showing the product in use are provided with a source credit.

Contents

IMPRINT	2
CONTENTS	3
INTRODUCTION	4
Preliminary remarks	4
Validity of the declaration of conformity	4
Manufacturer information	4
SECURITY	5
Warning levels	5
Important safety instructions	6
Intended Use	6
Requirements for the target group	7
Obligations of the operator	7
PRODUCT DESCRIPTION	8
Scope of delivery	8
Construction	9
Symbols and Connections	10
Technical data	11
SERVICE	12
Installation	12
Cleaning	12
Storage and transportation	12
Disposal	12
Maintenance	12
HELP	13
Warranty	13
Customer service	13

Preliminary remarks

Read this instruction manual carefully before using the product.

The product comes with a USB stick on which the operating instructions are stored in various national languages. The current version and other national languages can be found on our homepage.

The operating instructions are an essential part of the product and must be kept together with the product. If the product is sold or transferred, the operating instructions must be handed over to the new operator.

In addition to these operating instructions, all relevant regulations for diagnosing or troubleshooting intrinsically safe high-voltage systems in road vehicles are binding. This includes, among other things, the instructions for the vehicle manufacturer's respective diagnostic systems as well as operational safety requirements and the state of the art in dealing with high-voltage systems.

Validity of the declaration of conformity

The issued declaration of conformity applies to the product described in the operating instructions. In the event of changes, conversions or extensions, the declaration of conformity and the risk assessment lose their validity.

Manufacturer information

Akkuteam Energietechnik GmbH

akkuteam is a specialist provider of battery and backup power technology. We ensure grid-independent electrical energy supply in mobile and stationary areas.

We are an owner-managed, medium-sized family business. Our GmbH can now look back on 25 years of company history, which has always been characterized by strong growth. With currently over 70 employees, we work at 2 locations in southern Lower Saxony and from there we offer a nationwide service and even a global service for the automotive sector.

Our core competencies consist of project planning, sales and maintenance of stationary and mobile battery systems as well as energy storage systems, static uninterruptible power supply systems, safety lighting systems and power generators. With our products, we serve an electrical power range from a few watts to several megawatts. We round off our product portfolio with a qualified range of services. With around 25 technical employees and fitters, we carry out all assembly, maintenance and repair work required for our product areas.

This safety chapter informs you about the following:

- Warning levels included in this user manual
- Important safety information about the product,
- Intended use of the product,
- Requirements for the target group.

These operating instructions are exclusively valid for the following product:

Item number: ASE 405 491 00 000

Designation: Connection cable VAS 6558A/48

Warning levels

This chapter informs you about the warning levels that you will find in this user manual.

DANGER

Failure to follow the safety instructions **WILL** result in death or serious bodily injury!

WARNING

Failure to follow the safety instructions **CAN** result in death or serious bodily injury!

CAUTION

If the safety instructions are ignored, minor physical injury **MAY** result!

DANGER

Failure to observe the safety instructions could result in damage to the product!

Important safety instructions

This chapter informs you about the safety instructions that must be observed when handling the product.



DANGER

Danger to life due to electrical voltage!

The electrical voltage in other systems is life-threatening and will result in death from electric shock!

- Do not use the product for mains circuits!
- Never attempt to power other devices via the product!



WARNING

Danger to life due to electrical voltage!

The electrical voltage in high-voltage systems is life-threatening and can lead to death from electric shock!

Short circuits can occur due to liquids, condensates and high humidity!

- Prevent the product from coming into contact with liquids!
- Only use the product in closed and dry rooms!

Intended Use

Use the product exclusively in accordance with these operating instructions, otherwise the protection against electrical hazards provided for in the product is no longer guaranteed.

In accordance with the vehicle manufacturer's specifications in guided troubleshooting, the connecting cable VAS 6558A/48 serves as an extension cable for functional testing of the modules/communication when the BMCE is unscrewed. The product is suitable for testing the high-voltage battery in the following vehicles:

- First use Audi Q6 eTron 2024, Porsche Macan 2024

Vehicle manufacturers within the meaning of these operating instructions are exclusively vehicle manufacturers of the Volkswagen Group.

Any use beyond this is prohibited.

Requirements for the target group

Work on the product may only be carried out by qualified specialist personnel!

Qualified personnel as defined in these operating instructions meet all requirements applicable in the user country for work on high-voltage systems, accordingly:

- Regulations valid in the user country,
- Qualification according to DGUV 200-005 at least level 2 or equivalent,
- Vehicle manufacturer and operational specifications.

When using the product, the personal protective equipment specified by the vehicle manufacturer for work on high-voltage systems must be worn at all times.

Obligations of the operator

The operator must ensure that personnel working with the connection line meet the requirements of the target group.

The operator is also responsible for compliance with the following points:

- The connecting cable is always in perfect and defect-free condition.
- The regular inspection periods for the connection line, if applicable, set by the operator are adhered to and recorded.

Scope of delivery

Immediately check the condition and completeness of the scope of delivery. If there are any defects, contact the manufacturer immediately.



- (1) Connection cable VAS 6558A/48
- (2) USB stick with operating instructions
- (3) Information sheet

Construction







Structure of the product:



- (1) Connection plug
- (2) Connection plug

Symbols and Connections

The following symbols are shown on the product:

Symbol	Meaning
	The serial number, together with the manufacturer part number, is used to identify the product.
	The manufacturer part number, together with the serial number, is used to identify the product.
	The disposal instructions prohibit the disposal of the product with household waste. Always dispose of the product in compliance with all current local disposal regulations.
	The CE marking certifies that the product complies with all applicable European regulations and has undergone the prescribed conformity assessment procedure.
	The test seal indicates that the product is approved for use in the vehicle manufacturer's workshops and production facilities.
	Pay attention to the operating instructions!

Technical data

Rated data	Values
Manufacturer number	22104250
Maximum rated voltage	15 V/DC
Maximum rated current	5 A
Weight	~ 100g
Dimensions L/H/W	~300mm/200mm/50mm
Cable length	3000 mm

Environmental conditions	Operation	storage	Transport
temperature	5°C to 40°C	-20°C to 60°C	-20°C to 60°C
Height above sea level	max. 2000 m	No restriction	
humidity	max. 80% to 31°C, decreasing linearly to 50% at 40°C	max. 85 %	
	No condensation allowed. Maximum allowable relative humidity 60% if corrosive gas/air is present.		

This chapter informs you about the following activities:

- Installation,
- Cleaning,
- Storage and Transport,
- Disposal,
- Maintenance.

Installation

1. Follow the safety instructions.



2. Connect connector plugs.
 - ✓ The line has established the electrical connection.

Cleaning

Pay attention to the safety instructions!

The product may only be cleaned with a dry cloth.

Storage and transportation

When the product is not in use, store it in a dry and dust-free place.

Disposal

Pay attention to the safety instructions!

Always dispose of the product in compliance with all current local disposal regulations.

Maintenance

Pay attention to the safety instructions!

The national and local requirements for regular testing must be adhered to!

Check the product's functionality at intervals of no more than 24 months.

For a professional functional test, contact the manufacturer.

Warranty

The product comes with a warranty period of 24 months.

The warranty refers to a production defect or a clearly detectable defect in the product that is not due to user error.

All inquiries in this regard must be reported to the wholesaler with appropriate photo documentation, detailed description of the error and serial number.

Customer service

If you have general questions about usage and functionality, please contact the following support:

Akkuteam Energietechnik GmbH

Theodor-Heuss-Strasse 4

37412 Herzberg am Harz

Telephone: +49 (0) 5521 9981-0

Fax: +49 (0) 5521 9981-11

service@akkuteam.de

www.akkuteam.de

Volkswagen Aktiengesellschaft
Group After Sales – Group Service.
Literature and systems
Workshop equipment
Mailbox 011/4915
38442 Wolfsburg
For internal use only
Technical changes reserved
As of 01/2024

Akkuteam Energietechnik GmbH
Theodor-Heuss-Strasse 4
37412 Herzberg am Harz
Telephone: +49 (0) 5521 9981-0
Fax: +49 (0) 5521 9981-11
service@akkuteam.de
www.akkuteam.de
Technical changes reserved
As of 01/2024